

4.2mm(.165")Wire To Wire And Wire To Board Connector






Connector & Terminal

Shenzhen Hongru Connector Co., Ltd

Email: yukyli@hrb-connector.com
 Tel: 86-0755 2709 6669
 Fax: 86-0755 2709 2392
 Skype: haiyuncheng-vivian
 Mobile(whatsapp): 86-186 8112 3590
 Website: <http://www.hrb-connector.com>

SPECIFICATIONS:

- Current Rating: 9A AC, DC
- Voltage Rating: 600V AC, DC
- Operating Temperature: V2: -25°C ~ +85°C
- Contact Resistance: 10mΩ max.
- Insulation Resistance: 1000MΩ Min.
- Withstanding Voltage: 1500V AC/minute
- Material: Housing: Nylon66 UL94V-2
 Pin: Brass. Tin plated
- Pin In Housing Retention Force Requirement: 3.5kg (Min.)

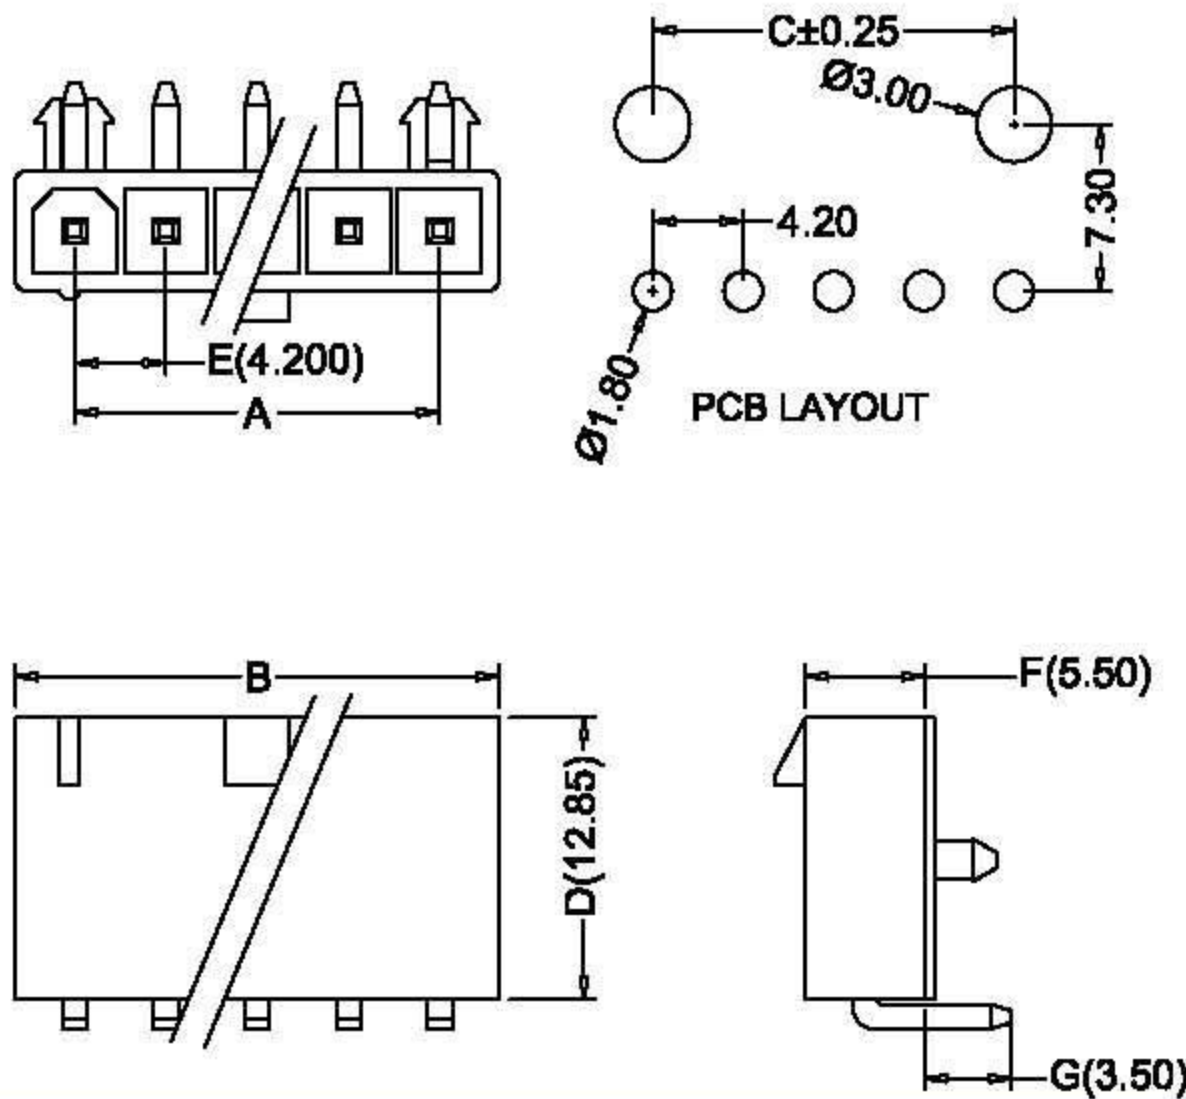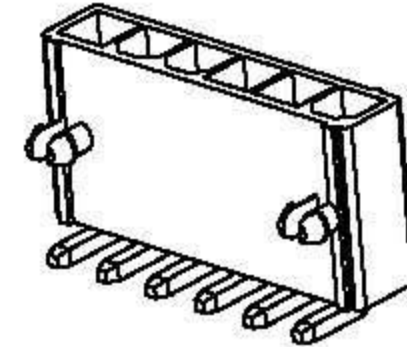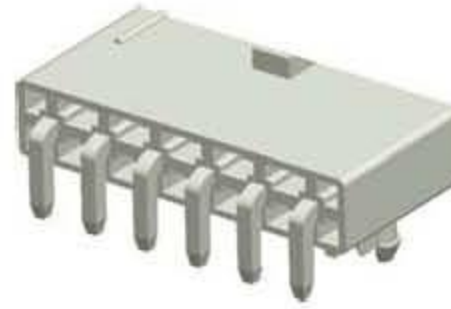

Ordering Information And Dimensions

Part NO.		Dimensions			Part NO.		Dimensions		
TYP UL94V-2	Circuits	Dim:A	Dim:B	Dim:C	TYP UL94V-2	Circuits	Dim:A	Dim:B	Dim:C
M4257R-1x2-D	2	4.20	9.80	/	M4257R-1x8-D	8	29.40	34.80	25.20
M4257R-1x3-D	3	8.40	13.80	4.20	M4257R-1x9-D	9	33.60	39.00	29.40
M4257R-1x4-D	4	12.60	18.00	8.40	M4257R-1x10-D	10	37.80	43.20	33.60
M4257R-1x5-D	5	16.80	22.20	12.60	M4257R-1x11-D	11	42.00	47.40	37.80
M4257R-1x6-D	6	21.00	26.40	16.80	M4257R-1x12-D	12	46.20	51.60	42.00
M4257R-1x7-D	7	25.20	30.60	21.00					

